


Best Practices:

Minimizing Wall Buckling & Column Flex



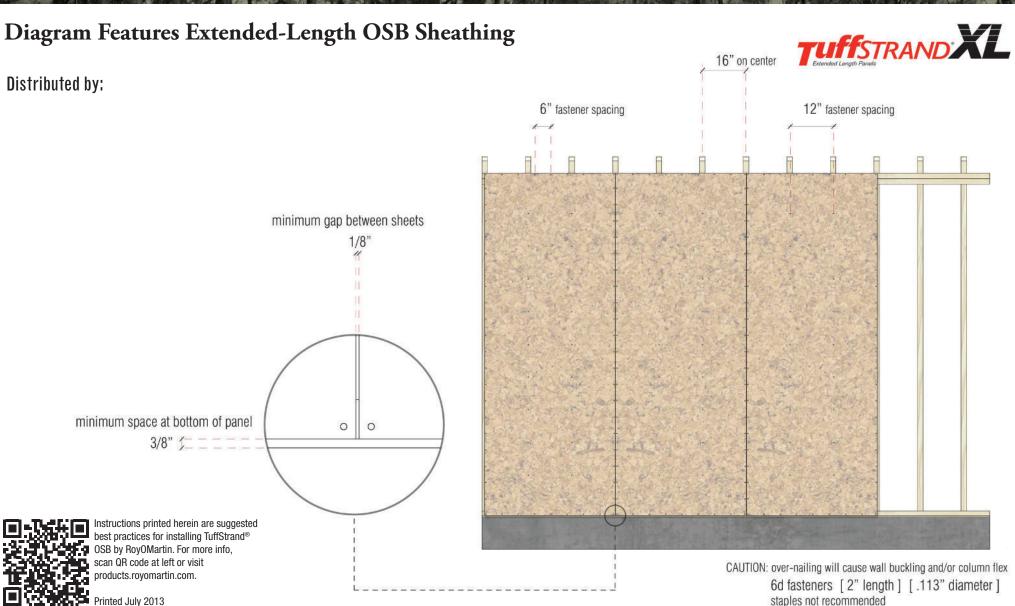


Best Practices:

Minimizing Wall Buckling & Column Flex

Diagram Features Extended-Length OSB Sheathing



Distributed by:

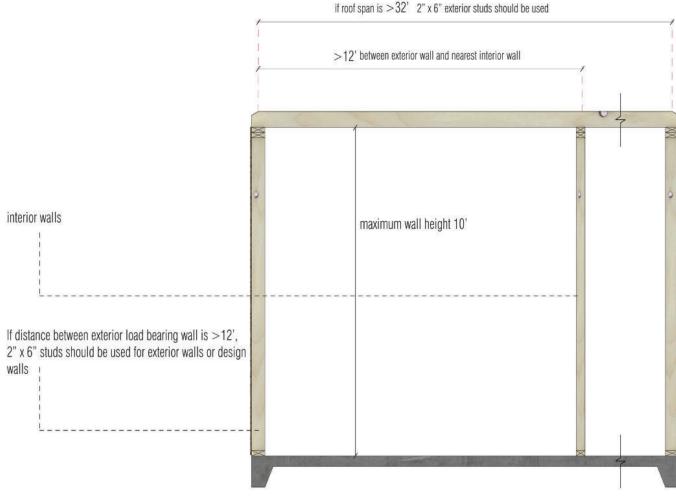



Instructions printed herein are suggested best practices for installing TuffStrand®
OSB by RoyOMartin. For more info, scan QR code at left or visit products.royomartin.com.

Printed July 2013

If roof span is < 32' and distance between load-bearing exterior wall and nearest interior wall is < 12', 2" x 4" studs may be used for both exterior and interior walls

6d fasteners [2" length] [.113" diameter] staples not recommended